

**Telescopic
Essence 90 cm
Stainless steel**

EAN 5414425006557



Energy label

▪ Energy Efficiency class (EElhood)	B
▪ Annual Energy Consumption (kWh/year) (AEChood)	62
▪ Fluid Dynamic Efficiency class (FDEhood)	C
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	B

Functions & features

▪ Motor	Integrated
▪ Sound absorber	Without
▪ Recirculation	Optional
▪ Auto stop	-
▪ Grease filter	655020
▪ Number of grease filters	2
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Push buttons
▪ Number of speeds	4

Dimensions

▪ Product dimensions (WxDxH) (mm)	898 x 290 x 316
▪ Dimensions cut-out opening (WxD) (mm)	x
▪ Min dimensions cabinet (WxDxH) (mm)	900 x 280 x 300
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 750
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	-
▪ Soft-ON/OFF	-
▪ Number of functional lights	2
▪ Total energy consumption functional light (W)	7
▪ Color functional light (K)	2700

Airflow and noise level





▪ Free airflow (m³/h)	581
▪ Airflow (m³/h) measured according to EN 61591	
▪ Sound regulation according to EN 60704-2-13	
▪ Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa)	206 / 282
▪ Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa)	303 / 374

Airflow and noise level

- Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa) 405 / 445
- Airflow duct out speed 4 (m³/h) / Max pressure duct out speed 4 (Pa) 522 / 482
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 1 (dB(A)) 23 / 34
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 2 (dB(A)) 31 / 42
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 3 (dB(A)) 42 / 53
- Sound pressure duct out speed 4 (dB(A)) / Sound power duct out speed 4 (dB(A)) 46 / 58

Technical specifications

- Maximum power (W) 165
- Voltage appliance (V) 230
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0.35
- Net weight (kg) 12
- Length power supply cable (m) 1,2

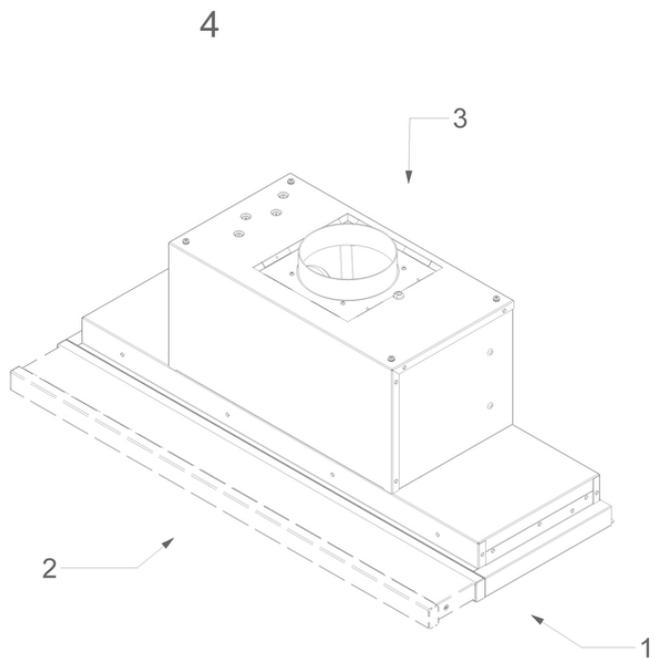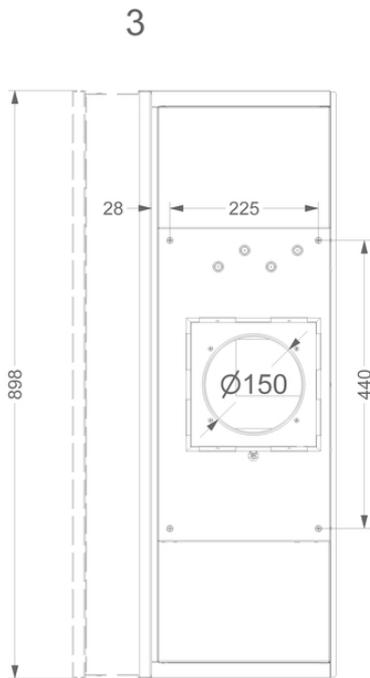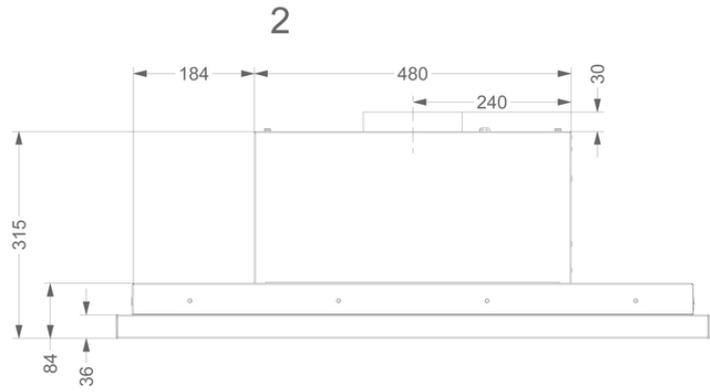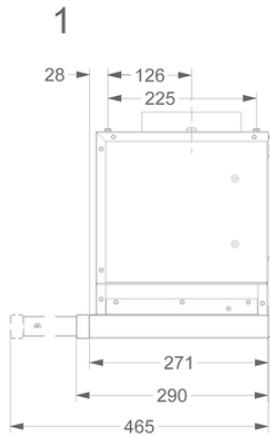

Accessories

Recirculation kit



906450

Exhaust grill for upper cabinet black

