

Wall mounted
Flatline 90 cm
Stainless steel



EAN 5414425076000

Energy label

▪ Energy Efficiency class (EEIhood)	A+
▪ Annual Energy Consumption (kWh/year) (AEChood)	34,1
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	D

Functions & features

▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Optional
▪ InTouch function	Optional
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10
▪ Grease filter	7530020
▪ Number of grease filters	1
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Push buttons
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6

Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	898 x 554 x 660 - 1050
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	898 x 554 x 730 - 1120
▪ Max height optional chimney exhaust (mm)	1410
▪ Max height optional chimney recirculation (mm)	1480
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	-
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 750
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	▪
▪ Soft-ON/OFF	▪
▪ Number of functional lights	4
▪ Total energy consumption functional light (W)	12
▪ Color functional light (K)	2700

Airflow and noise level

▪ Free airflow (m³/h)	815
-----------------------	-----



Airflow and noise level

- Airflow (m³/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa) 233 / 70
- Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa) 415 / 240
- Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa) 551 / 384
- Airflow duct out max powerspeed (m³/h) (Qboost) / Max pressure duct out max powerspeed (Pa) 635 / 385
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 1 (dB(A)) 24 / 35
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 2 (dB(A)) 36 / 47
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 3 (dB(A)) 44 / 55
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct out at max powerspeed (dB(A)) (LWAboost) 46 / 57

Technical specifications

- | | |
|---|------|
| ▪ Maximum power (W) | 118 |
| ▪ Voltage appliance (V) | 230 |
| ▪ Frequency (Hz) | 50 |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0.25 |
| ▪ Net weight (kg) | 28,7 |
| ▪ Length power supply cable (m) | 1,3 |

7600 - 7602

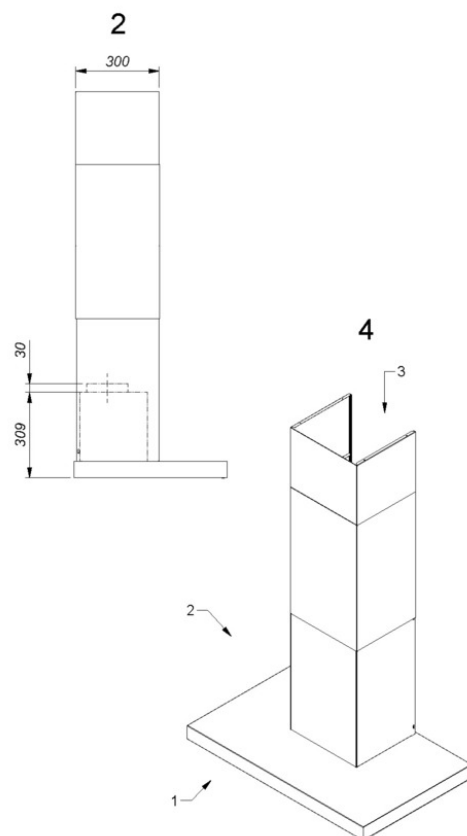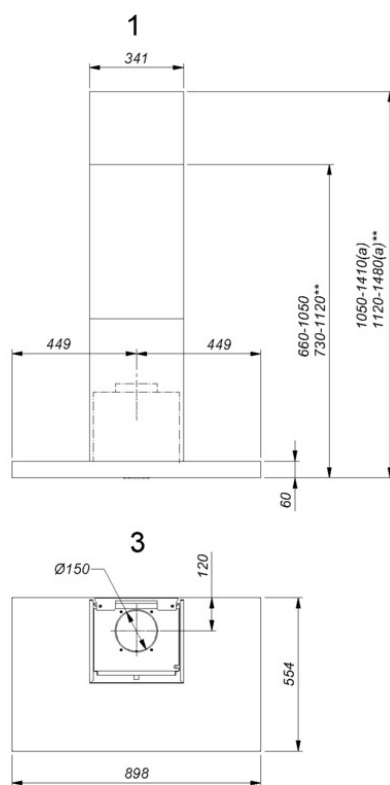

Installation accessories

Back panel & chimney extensions

- 7600100 Chimney extension Novy Flatline

Additional accessories

- 840029 Remote control (optional)

Accessories

Recirculation kit



7600400

Monoblock recirculation set Novy Flatline wall 90 and 120 cm

Control kit



990030

Kit connection with external cover and/or lighting

